
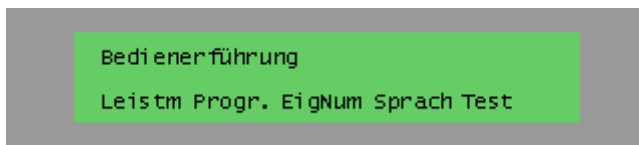


Advanced Single Use

Query your own call number


Go to the operator guidance by pressing the information key . The following display appears:




Press the key **EigNum**. Your call number will now be displayed.

Setting password


Go to the operator guidance by pressing the information key . The following display appears:

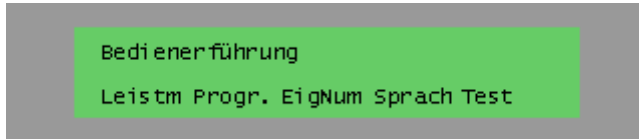


Now press the key **Progr.** and then the key **Paßwort**. You will now be asked to enter the old password

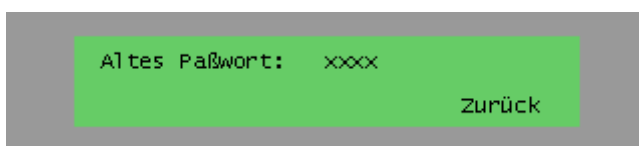

then a new password

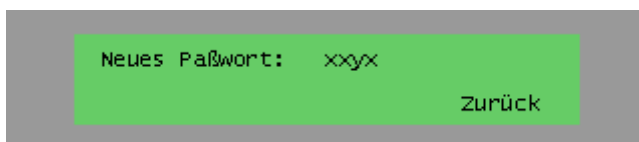

and to confirm it.

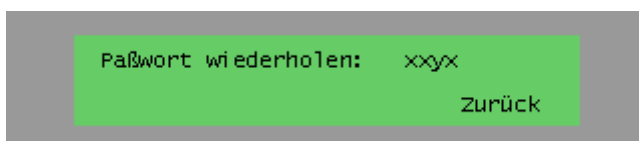

Your new password is now valid.


Note: Upon delivery of the devices the password is **0000**.

Selecting a tune

To select one of the 16 tunes, first press the OK-key



The following display appears:

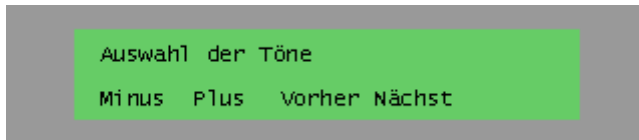

Pressing the key **Plus** will increase the volume, pressing the key **Minus** will decrease it.

To confirm the volume use the key



Adjusting the volume on the handset


To adjust the volume of your interlocutor, press the keys **Plus** or **Minus** **during** the call.

Adjusting the display contrast

Go to the operator guidance by pressing the information key




The following display appears:

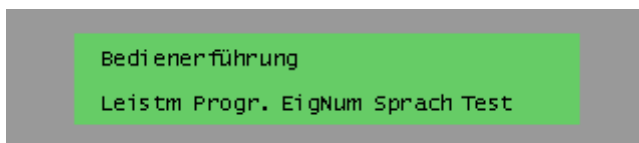

Now press the key **Progr.** and then the key **Displ.**

Now you can adjust the brightness of your display by pressing the keys **+** and **-**. There are 16 different levels.

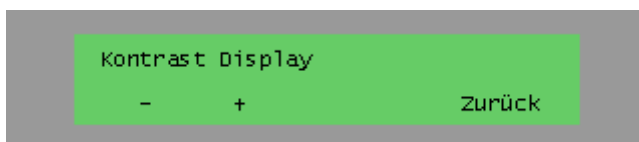


Please note that both the display for the soft keys and the display beside the function keys will change.


Programming keys (one-touch destinations)


You can program one-touch (call number and name) destinations on the soft keys of your phone.

By pressing the key  and **Progr.** you reach the programming mode.

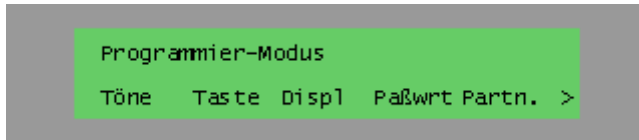

Press **Taste**

 Select a free soft key

 Enter call number

Press **Bestät**

 Enter name of the one-touch destination (max. 6 characters)

Confirm again **Bestät**

 Complete

The name of your one-touch destination is now in the display of your selected soft key.

You can also assign one-touch destinations to your free function keys. The procedure is the same, you just have to press a function key instead of a soft key. Additionally, the function keys have to be labeled by hand or with the computer.

Instead of one-touch destinations you can assign key figures (e.g. for call forwarding) to your soft keys and function keys. The first 4 steps are the same, then, instead of a call number, you enter a key figure (e.g. * 1 4 - call forwarding when busy/by time - see separate key figure list)